

Model W6154M-HT RFID Tag

Specifications & Data Sheet

The Model W6154M-HT high temperature Tag is capable of surviving the unprecedented temperature of 400°C (752°F), providing identification and tracking capabilities never-before available in rugged or hazardous use-areas. This Tag can be mounted to any metallic surface by bolting, riveting, or welding and endure high pressure environmental conditions.





Model Number	Part Number	Description	Read Range (on metal)
W5944M-HT	807-0016-W6154M-HT	Model W6154M-HT Weldable Metal Mount High Temp 400°C Tag	A99H Antenna – 5' A55C Antenna – 4' A64C Antenna – 4'

Mechanical:	Measurements:	61x54x17mm	2.4"x2.1"x.67"
	Material:	Steel Shell	Ceramic
Certifications:	Weight:	56.7 grams	2 ounces
	RoHS III	REACH	CE
	FCC Part 15 & ETSI	ATEX compliant, SIL2	Free of BBP, DEHP, DBP, DIBP

Monza X-8K Dura: RF:	TID – 96 bits	UID/EPC – 128 bits	8,192 bits
	Standard:	EPC Class1 Gen2	ISO 18000-6C
	Frequency:	902 – 928 MHz (North America)	860 – 870 MHz (EU, Japan)
	Power:	Passive, no Battery	Powered by Reader RF Signal
	TID – 32 to 208 bits	EPC – 0 to 496 bits	User – 0 to 61,400 bits

Environmental:	Temp, Peak	+400°C/+752°F @1 hour duration	
	Temp, Operating	-50°F to +185°F	-46°C to +85°C
	Life:	40 Year Shelf Life	100k write
	Ingress Protection:	IP68	

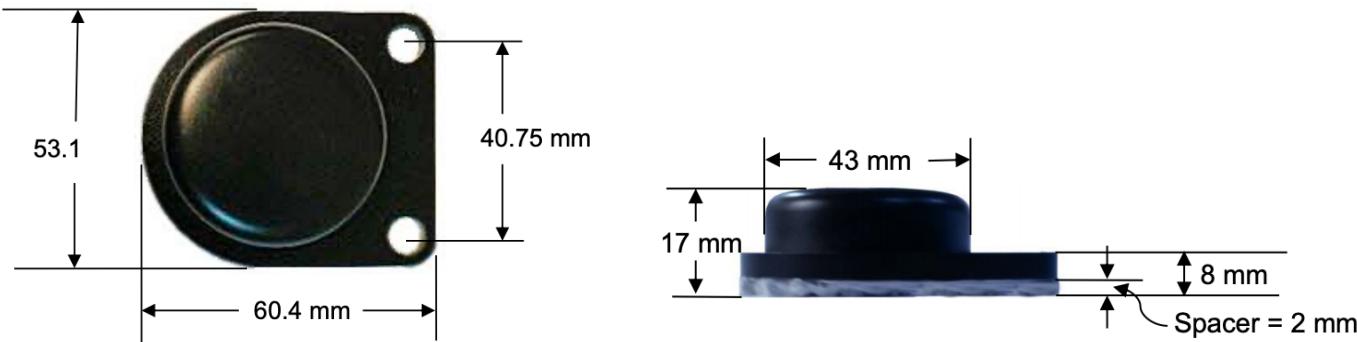

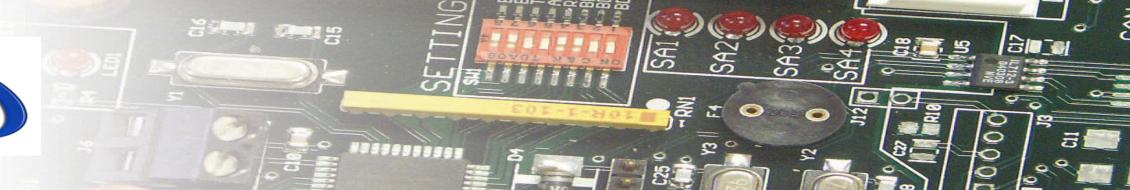

Available UHF Memory Chips:

	TID (ROM)	UID (EPC)	User Memory
Alien	64 bits	96 to 480 bits	512 bits
	64 bits	128 bits	128 bits
	48 bits	96-128 bits	128 bits
	48 bits	496 bits	688 bits
	TID (ROM)	UID (EPC)	User Memory
EM	64 bits	0 bits	0 bits
	64 bits	96 bits	0 bits
	32 bits	208 bits	0 bits
	64 bits	96 bits	720 bits
	48 bits	352 bits	3072 bits
	96 bits	64-160 bits	0 bits
	96 bits	Up to 480 bits	Up to 2048 bits less EPC
	TID (ROM)	UID (EPC)	User Memory
Fujitsu (FRAM)	208 bits	480 bits	61,400 bits
	208 bits	480 bits	61,400 bits
	176 bits	160 bits	0 bits
	TID (ROM)	UID (EPC)	User Memory
Impinj	96 bits	Up to 128 bits	32 bits
	96 bits	Up to 496 bits	128 bits
	96 bits	Up to 128 bits	512 bits
	96 bits	Up to 256 bits	480 bits
	96 bits	Up to 128 bits	8,192 bits
	96 bits	Up to 128 bits	Up to 64 bits
	96 bits	96 bits	0 bits
	96 bits	96 bits	0 bits
	96 bits	Up to 128 bits	32 bits
	96 bits	128 bits	32 bits
	96 bits	128 bits	0 bits
	96 bits	96 bits	32 bits
	TID (ROM)	UID (EPC)	User Memory
	48 bits	128 bits	0 bits
NXP	48 bits	128 bits	32 bits
	48 bits	448 bits	1024 bits
	48 bits	448 bits	2048 bits
	96 bits	128 bits	0 bits
	96 bits	96 bits	32 bits
	96 bits	96 bits	0 bits
	64 bits	128 bits	0 bits
	96 bits	256 bits	512 bits
	96 bits	Up to 448 bits	Up to 640 bits
	64 bits	240 bits	512 bits
	64 bits	240 bits	0 bits
	64 bits	0 bits	1680 bits

