


4

3

2

1

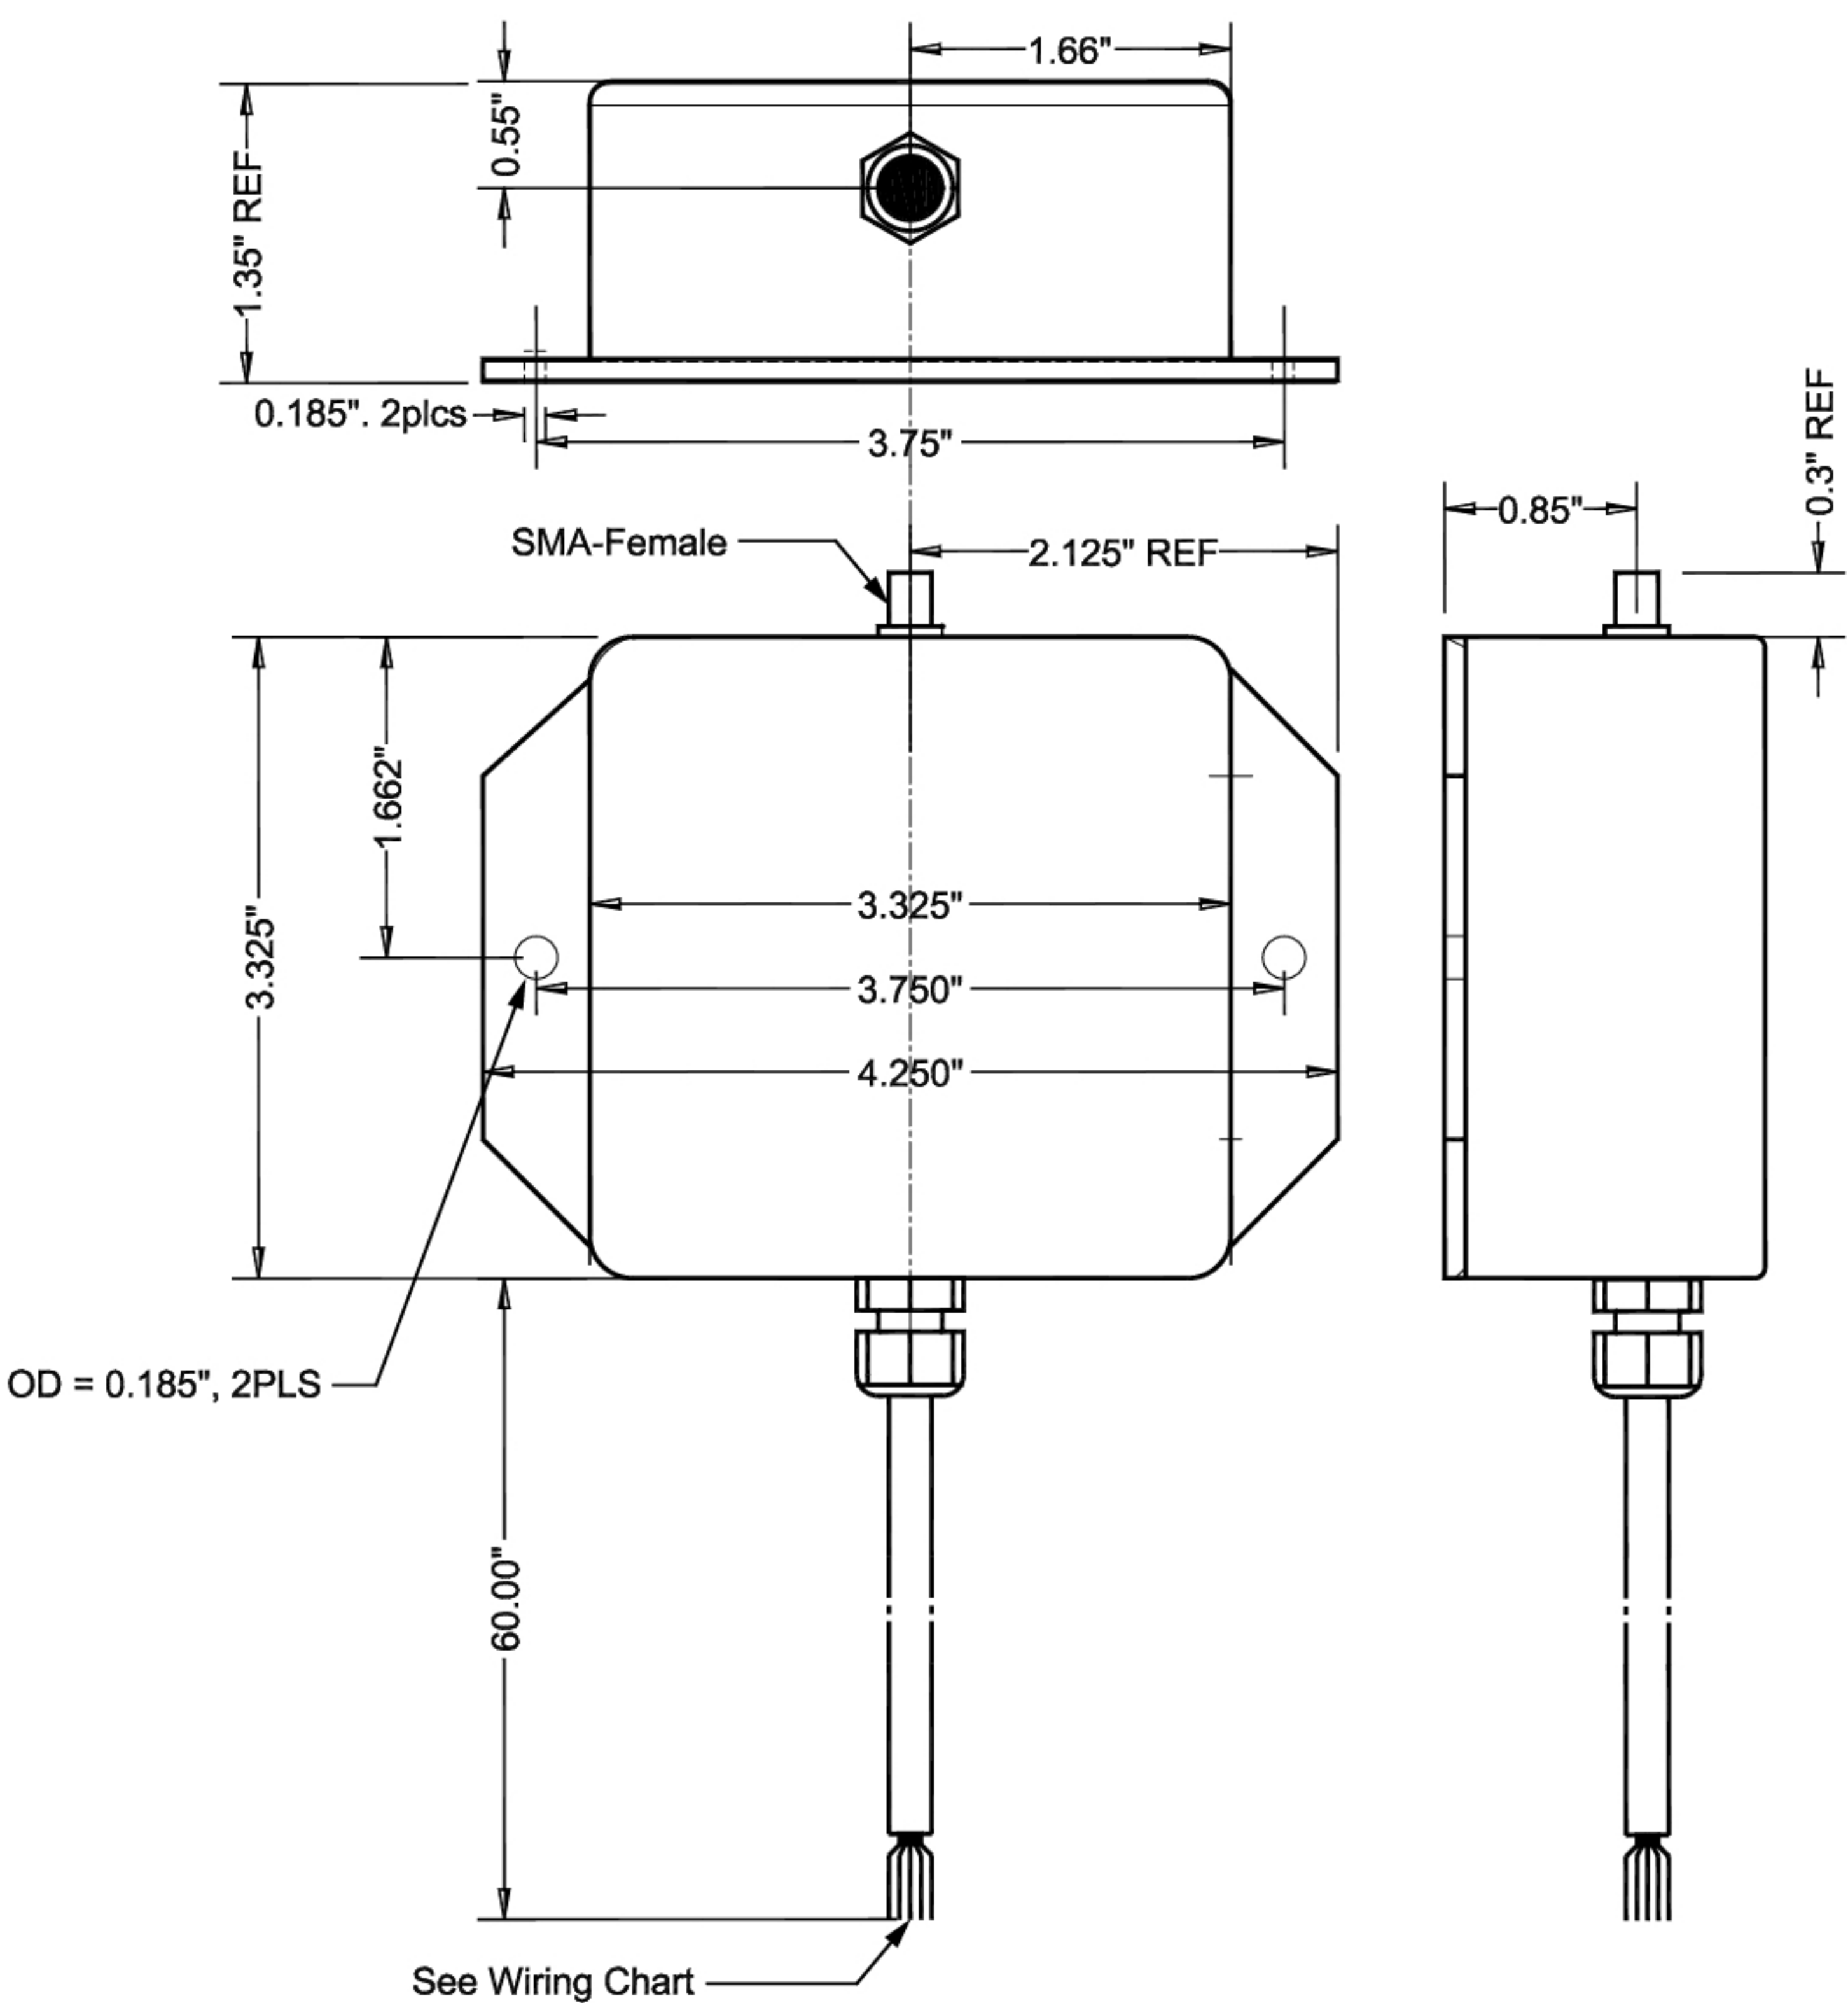

- NOTES: FOR 830-0006-03-SBITE
- Power: 8VDC - 24VDC @ 150mA Min
 - RS232 Parameters: Default
 - * Baud Rate: 115200
 - * Data Bit: 8
 - * Stop Bit: 1
 - * Parity: None
 - * Hand Shaking: None
 - ISO: Default ISO15693
 - Wiring Color Code:
 - RED: +Power In
 - BLACK: 0VDC
 - YELLOW: Signal Ground (RS232)
 - GREEN: RxD (To Reader)
 - WHITE: TxD (From Reader)
 - EMI Sprayed inside both Encl and Lid (optional)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE: FRACTIONS: DECIMALS ANGLES 1/2DEG .XXX = 0.005		RFID, INC. 14190 E. Jewell Ave, Suite 4 Aurora, CO 80012.	
		TITLE READER-HF-EXTERNAL ANTENNA	
SIZE B	CAGE CODE	DWG NO 830-0006-03-SBITE-090	REV 0
SCALE NONE	DO NOT SCALE		SHEET 1 OF 1